

RESILMOUNT A237R™ ISOLATION CLIP

MECHANICALLY ISOLATE CEILINGS AND WALLS


ISOLATE AIRBORNE SOUND FROM STUDS

SOUND CELLS ABSORB SOUND

FITS STANDARD FURRING CHANNEL



Acoustic control for airborne sound has become a major issue for architects and interior designers of high density apartment living. Resilmount A237R™ clips are an engineered, patented acoustic resilient mounting bracket for standard furring channels. The A237R has been proven to reduce airborne and structure-borne vibration in wall and ceiling applications.

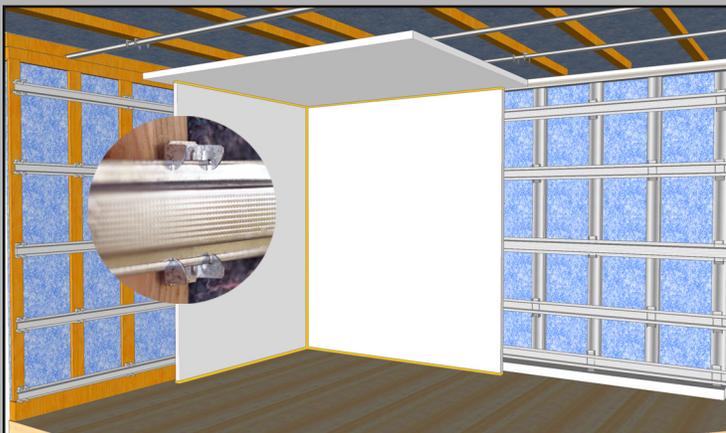

A237R clips install on ceilings joists and wall studs. Hat channel snaps into the clips, and screws are used to install the drywall directly into the channel.

Sound Isolation

Resilmount A237R sound isolation clips prevent sound from travelling through walls and ceilings. By physically separating the walls and ceilings from joists, Resilmount A237R clips stop sound from moving from one room to another.

Technically Effective

Resilmount's clips utilize a patented thermoplastic rubber pad that is more effective than normal rubber. Sound cell design breaks up and absorbs sound.

Easy To Install

Resilmount A237R clips fit standard 20 gauge and 25 gauge furring (hat) channel. Furring channel easily snaps into A237R clips allowing for quick and painless installations.




RESILMOUNT A237R CLIPS

Resilmount A237R sound isolation clips work to mechanically “decouple” walls and ceilings from a building's frame, reducing the amount of sound energy travelling from one room to another. Additionally, the thermoplastic rubber mount of the A237R clips absorbs sound, reducing noise transmission.

STANDARD WALL ASSEMBLY - SINGLE LAYER OF DRYWALL ON EACH SIDE OF WALL

34-39 STC


R-13 Insulation
5/8" Type X Drywall

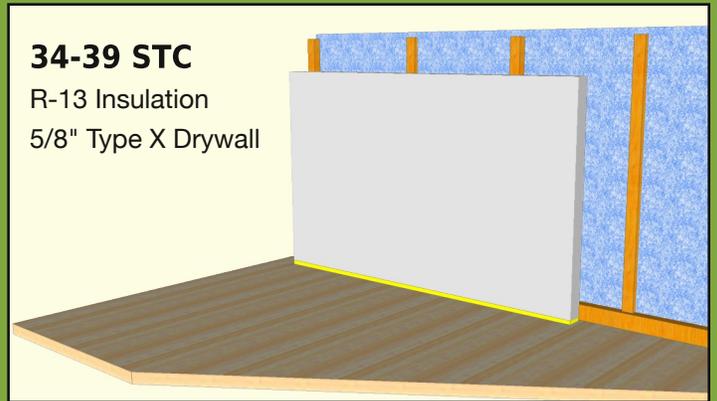

RESILMOUNT CLIPS AND SINGLE LAYER OF DRYWALL ON EACH SIDE OF WALL

55 STC


R-13 Insulation
7/8" Hat Channel
5/8" Type X Drywall

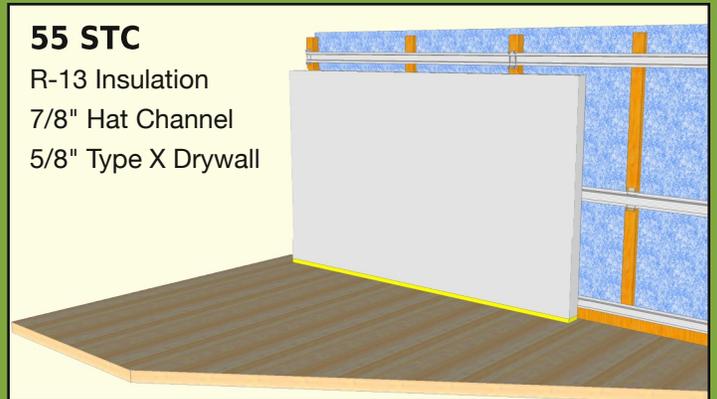

RESILMOUNT CLIPS AND GREEN GLUE ASSEMBLY APPLIED TO EACH SIDE OF WALL

62 STC

R-13 Insulation
7/8" Hat Channel
5/8" Type X Drywall
Green Glue
5/8" Type X Drywall

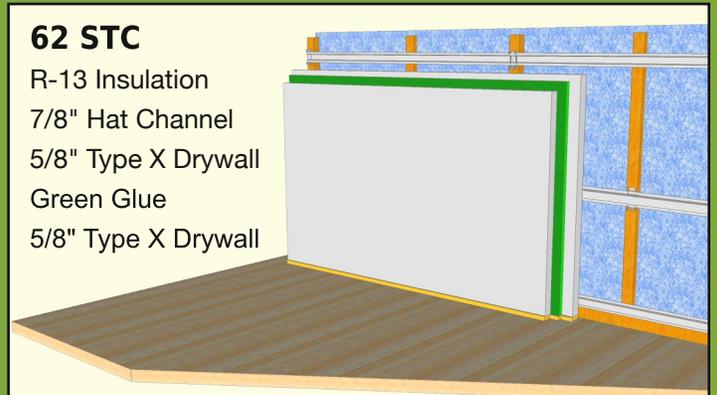

SOUND ISOLATION MADE EASY

Resilmount A237R sound isolation clips are the standard for isolating wall and ceiling drywall from studs and joists. A237R clips eliminate the need for complex wall construction techniques. Instead of installing double stud or staggered stud wall assemblies, simply add A237R clips and hat channel to a standard single stud wall assembly.

In most cases, measuring and screwing in clips, followed by snapping in hat channel should be an simple and straightforward process.

When combining a Resilmount clips and channel assembly with the application of Green Glue Noiseproofing Compound and extra layers of drywall, you create a total noise solution that effectively reduces high, mid, and low frequencies. Acoustical sealant to fill perimeter gaps and gaps around fixtures adds a finishing touch to stop noise propagation.

Soundproofing Los Angeles makes ordering all the products you need for your soundproofing project a snap. Give us a call or order directly off our website for the best prices.